



# aluminium BSC94

Slim or standard interlock, in-line sliding doors



**BSC94 SLIM**  
45mm Interlock

SHOWN ACTUAL SIZE 1:1



85mm STANDARD

115.5mm

DUAL RAIL

<b>U</b>	<b>U</b>
VALUE	VALUE
TRIPLE	DOUBLE
<b>1.7</b>	<b>1.9</b>
w/m <sup>2</sup> K	w/m <sup>2</sup> K

STANDARD FEATURES

- Flush external finish
- 85mm interlock
- 28mm double-glazed
- Spanning up to 7 leaves wide
- Leaf sizes up to 1200mm and 2400mm high
- PAS 24 compliance
- High performance for air-tightness, water tightness and wind loading

OPTIONAL FEATURES

- Secured by Design compliance
- Document Q compliance
- 20/30mm triple-glazed
- Range of hardware and security features
- 45mm interlock - BSC94 SLIM
- Multiple sliding configurations
- Dual or triple track options
- Single or dual colour

PERFORMANCE

- U-values as low as 1.7 W/m<sup>2</sup>K;
- Class 4 (600PA) air tightness
- Class 7A (300PA) water tightness
- C4 wind load of 1600PA.

# aluminium BSC94

## HARDWARE FINISHES



## STANDARD DOOR FINISHES



## OPTIONAL DOOR FINISHES



A wide range of RAL colours and finishes are available to complement any style or period of home

Platinum<sup>®</sup>  
NRG



Combining high performance with stunning design, our sliding aluminium door systems provide a versatile solution for any architectural project. Manufactured to the highest UK standards, this multi-configuration inline system offers outstanding thermal performance and a wide range of customisable options.


SHOWN ACTUAL SIZE 1:1



45mm SLIM

115.5mm

DUAL TRACK

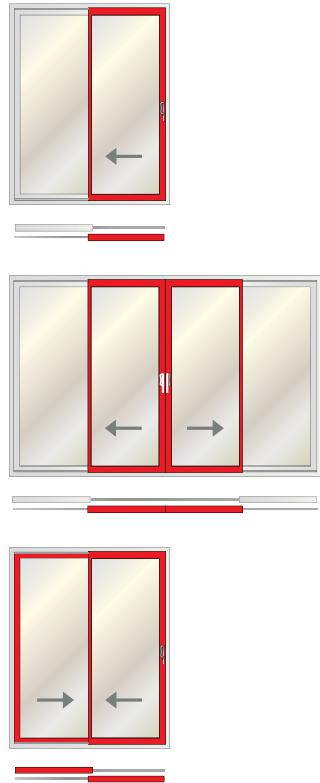

TRIPLE TRACK



Intelligent design means the BSC94 SLIM has a 45mm meeting stile only, retaining the strong deep profiles for the outer frames. The security and performance of the standard door are retained with the option of hiding some of the outer frame with the door reveals and floor height.

