



# Whiteline Manufacturing Ltd.

26-36 Hawthorn Road, Eastbourne, East Sussex BN23 6QA

T: 01323 723724 F: 0845 280 2815 E: enquiries@whiteline.co.uk

# Lift & Slide Patio Door Order Form

## CUSTOMER DETAILS

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## DELIVERY ADDRESS

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

PAGE

OF

## REFERENCE

## REQUIRED DATE

## QUOTE NUMBER

## SPECIFICATION


DIMENSIONS	Width mm	Height mm
NUMBER OF DOORS	Sliding Internal (recommended) <input type="checkbox"/>	Sliding External <input type="checkbox"/>
SASH STYLE	Stepped <input type="checkbox"/>	Contemporary <input type="checkbox"/>
THRESHOLD	Low Threshold with Ramp <input type="checkbox"/>	Standard Outerframe <input type="checkbox"/>
CILL NOSE	Cill Nose <input type="checkbox"/>	No Cill Nose <input type="checkbox"/>
FRAME COLOUR	External	Internal
SASH COLOUR	External	Internal
INTERLOCK	Slim 52mm (not on triple track) <input type="checkbox"/>	Standard 80mm <input type="checkbox"/>
TRICKLE VENTS	PVCu 2500mm <sup>2</sup> <input type="checkbox"/>	4000mm <sup>2</sup> <input type="checkbox"/>
DRAINAGE	Concealed <input type="checkbox"/>	Face <input type="checkbox"/>
CYLINDER	3* ATK <input type="checkbox"/>	3* ATK Thumbturn <input type="checkbox"/>
GLASS	Toughened <input type="checkbox"/>	Laminated <input type="checkbox"/>
	Clear <input type="checkbox"/>	Obscure <input type="checkbox"/>
SPACER BAR	Black <input type="checkbox"/>	White <input type="checkbox"/>
HANDLE OPTIONS	Internal and External Handle	White <input type="checkbox"/>
	Internal Handle with External Finger Grip	White <input type="checkbox"/>
UPGRADES	Drop Assist <input type="checkbox"/>	Lift Assist <input type="checkbox"/>

Add-On


25mm ☐

## CONFIGURATIONS


Dual Track ☐

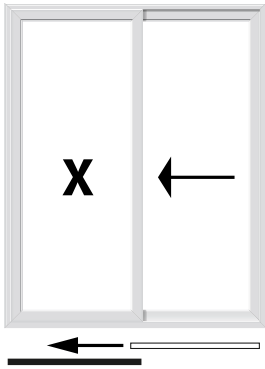


Dual Track ☐

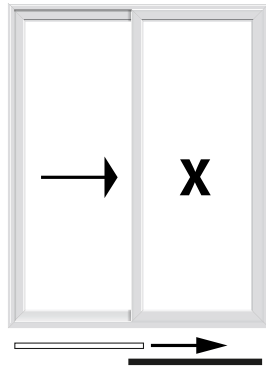


Dual Track ☐

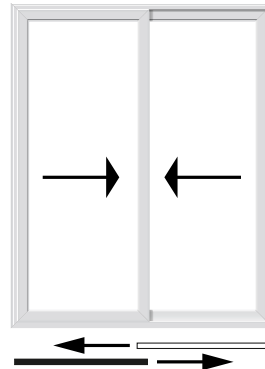


Dual Track ☐

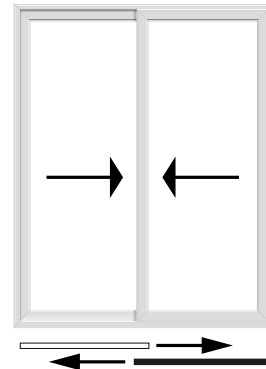


Dual Track ☐

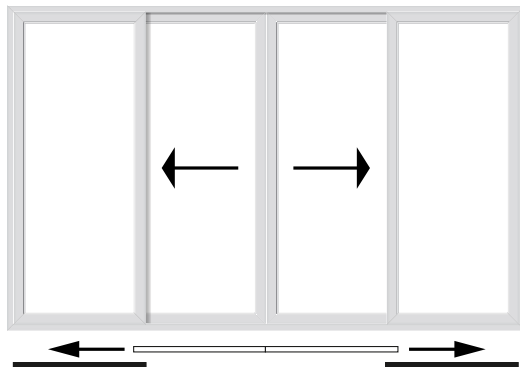

Triple Track ☐

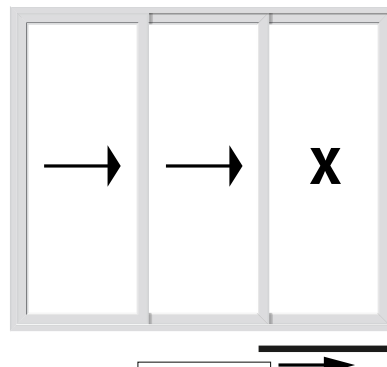

Triple Track ☐

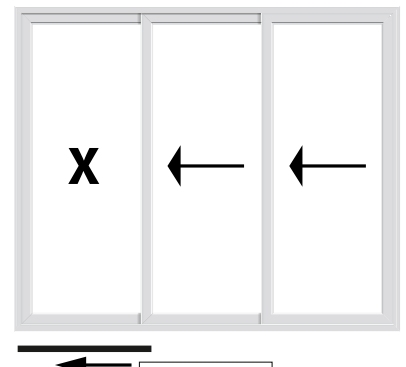

SIGNATURE

PRINT NAME

DATE

/ /



### 1. Low Threshold with Ramp

25mm high, tested to the requirements of Part M  
\*Only available in Dual Track

### 2. Standard Outer Frame


38mm high inside  
\*Allow an additional 12mm if using optional drainage tray

### 3. Standard Outer Frame with Clip-on Cill Nose


\*Allow an additional 12mm if using optional drainage tray

## Threshold Options


#### 1. Low Threshold with Ramp

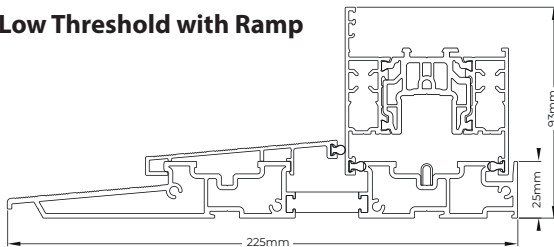


#### 2. Standard Outer Frame

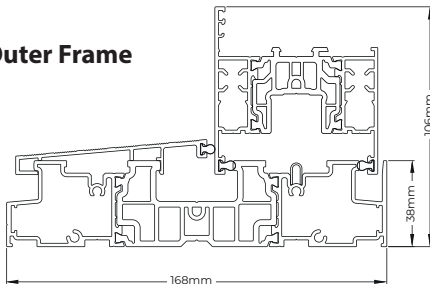

#### 3. Standard Outer Frame with Clip-on Cill Nose and Drainage Tray

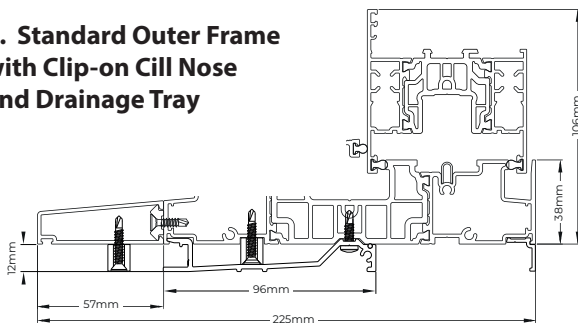


#### 4. Standard 3-Pane Outer Frame and Drainage Tray

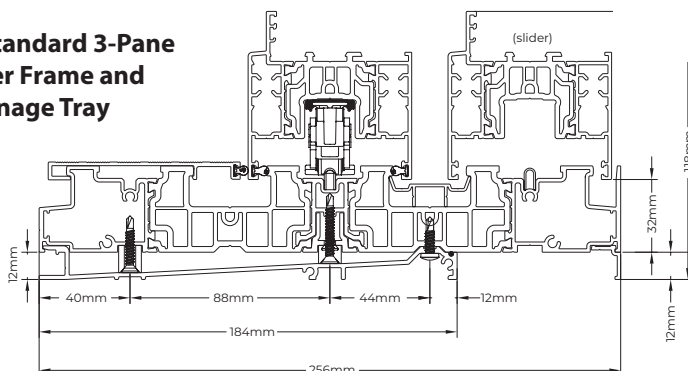


## At a glance

- Double and triple track options
- Max. 6.5m x 2.5m
- Max 400kg per Sash
- Slim 106mm Frame to Sash Sightline
- Standard 80mm Interlock Sightline
- Slim 52mm Interlock Option
- Suitable for most dual track options
- Up to 44mm Triple Glazing



Square cut frames for easy assembly on site if required

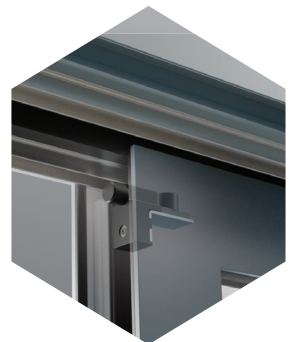

Concealed buffers help dampen sash operation



Flush jambs prevent snagging and keep visual lines clean