



Whiteline Manufacturing Ltd.

26-36 Hawthorn Road, Eastbourne, East Sussex BN23 6QA

T: 01323 723724 F: 0845 280 2815 E: enquiries@whiteline.co.uk

Lift & Slide Patio Door Order Form

CUSTOMER DETAILS

DELIVERY ADDRESS

PAGE

OF

REFERENCE

REQUIRED DATE

QUOTE NUMBER


SPECIFICATION

DIMENSIONS	Width mm	Height mm
NUMBER OF DOORS	Sliding Internal (recommended) ☐ Sliding External ☐	
SASH STYLE	Stepped ☐ Contemporary ☐	
THRESHOLD	Low Threshold with Ramp ☐ Standard Outerframe ☐	
CILL NOSE	Cill Nose ☐ No Cill Nose ☐	
FRAME COLOUR	External	Internal
SASH COLOUR	External	Internal
INTERLOCK	Slim 52mm (not on triple track) ☐ Standard 80mm ☐	
TRICKLE VENTS	PVCu 2500mm ² ☐ 4000mm ² ☐ 5000mm ² ☐ Aluminium 4000mm ² ☐	
DRAINAGE	Concealed ☐ Face ☐ None ☐	
CYLINDER	3* ATK ☐ 3* ATK Thumbturn ☐	
GLASS	Unit Thickness 28 ☐ 36 ☐ 44 ☐	
	Toughened ☐ Laminated ☐ Acoustic ☐	
	Clear ☐ Obscure ☐ Pattern:	
SPACER BAR	Black ☐ White ☐ Grey ☐	
HANDLE OPTIONS	Internal and External Handle White ☐ Black ☐ Silver ☐ Stainless Steel ☐	
	Internal Handle with External Finger Grip White ☐ Black ☐ Silver ☐ Stainless Steel ☐	
UPGRADES	Drop Assist ☐ Lift Assist ☐ Lift and Drop Assist ☐	


Add-On 25mm ☐

CONFIGURATIONS


Dual Track ☐

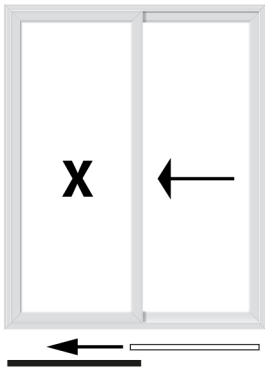


Dual Track ☐

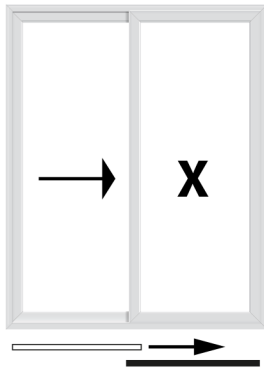


Dual Track ☐

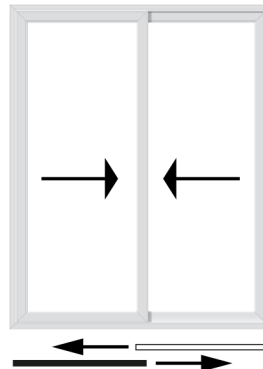


Dual Track ☐

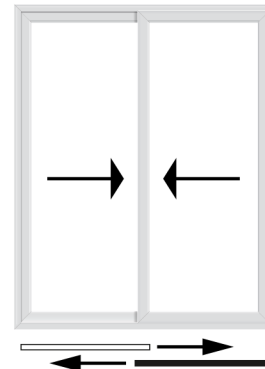


Dual Track ☐

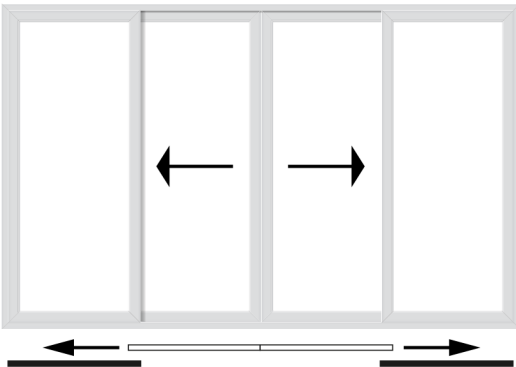

Triple Track ☐

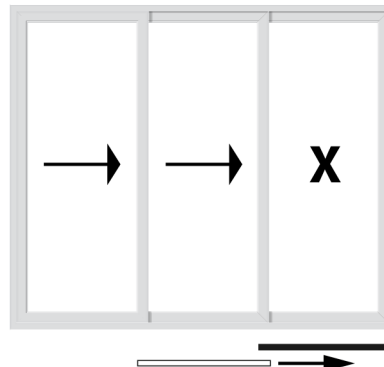

Triple Track ☐

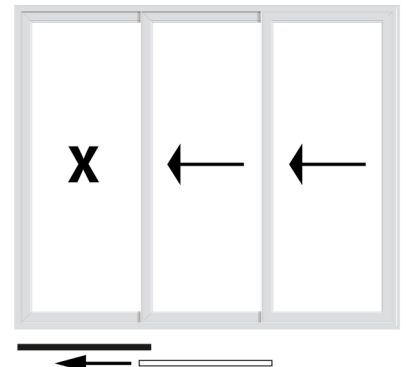

SIGNATURE

PRINT NAME

DATE

/ /



1. Low Threshold with Ramp

25mm high, tested to the requirements of Part M
*Only available in Dual Track

2. Standard Outer Frame


38mm high inside
*Allow an additional 12mm if using optional drainage tray

3. Standard Outer Frame with Clip-on Cill Nose


38mm high inside
*Allow an additional 12mm if using optional drainage tray

Threshold Options


1. Low Threshold with Ramp

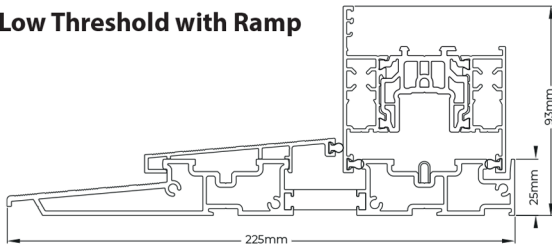


2. Standard Outer Frame

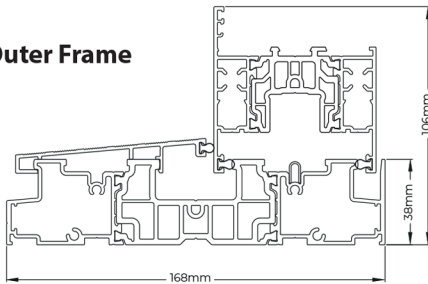

3. Standard Outer Frame with Clip-on Cill Nose and Drainage Tray

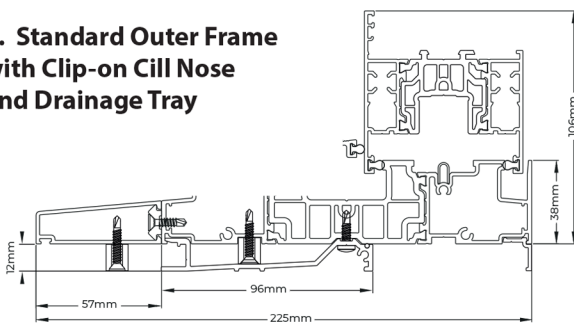


4. Standard 3-Pane Outer Frame and Drainage Tray

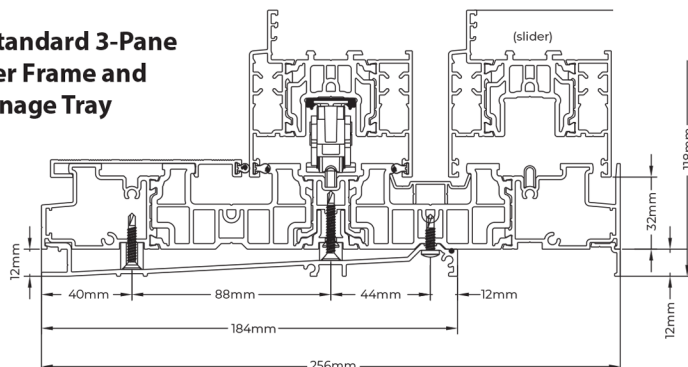


At a glance

- Double and triple track options
- Max. 6.5m x 2.5m
- Max 400kg per Sash
- Slim 106mm Frame to Sash Sightline
- Standard 80mm Interlock Sightline
- Slim 52mm Interlock Option
- Suitable for most dual track options
- Up to 44mm Triple Glazing



Square cut frames for easy assembly on site if required



Concealed buffers help dampen sash operation



Flush jambs prevent snagging and keep visual lines clean